

NÚMERO DE CÓDIGO

1001020

DESCRIPCIÓN

Porcelana Híbrido Mingitorio.

DETALLES

- Dimensiones Nominales: 14 $\frac{3}{8}$ " x 19 $\frac{5}{8}$ " x 26 $\frac{3}{4}$ " (365 x 498 x 679mm)

CARACTERÍSTICAS

- Porcelana Blanca
- Ensamble de carcasa de cartucho
- Chapetón de salida de 2" NPT y Juego Uni-coupler
- Todo el herraje de montaje incluido
- Un (1) cartucho reemplazable incluido†
- Operación higiénica, sin contacto
- Hasta 5x más limpio que los Mingitorios de descarga

REQUERIMIENTOS DE SISTEMA DE PLOMERÍA

- Máxima Presión Estática: 80 PSI (552 kPa)

DESCARGAS

- [HYB 1000 Installation Instructions](#)
- [Hybrid & Waterfree Urinal Series Repair and Maintenance Guide](#)
- [Cleaning and Cartridge Replacement Repair and Maintenance Guide](#)
- [Descargas Adicionales](#)

VIDEOS

-  [Hybrid Urinal](#)

**CUMPLIMIENTOS Y CERTIFICACIONES**BREEAM®
WATER

CALGreen

GREEN
GLOBES

()


NOTAS

Toda la información contenida dentro de este documento está sujeta a cambio sin previo aviso.

All vitreous china dimensions shown in these drawings are nominal and not to scale. Dimensions can vary within the tolerances established in the governing ASME A112.19.2/CSA B45.1 standard. It is important to consider this when planning rough-in and plumbing layouts.

GARANTÍA[View Warranty Information](#)

PREPARACIÓN

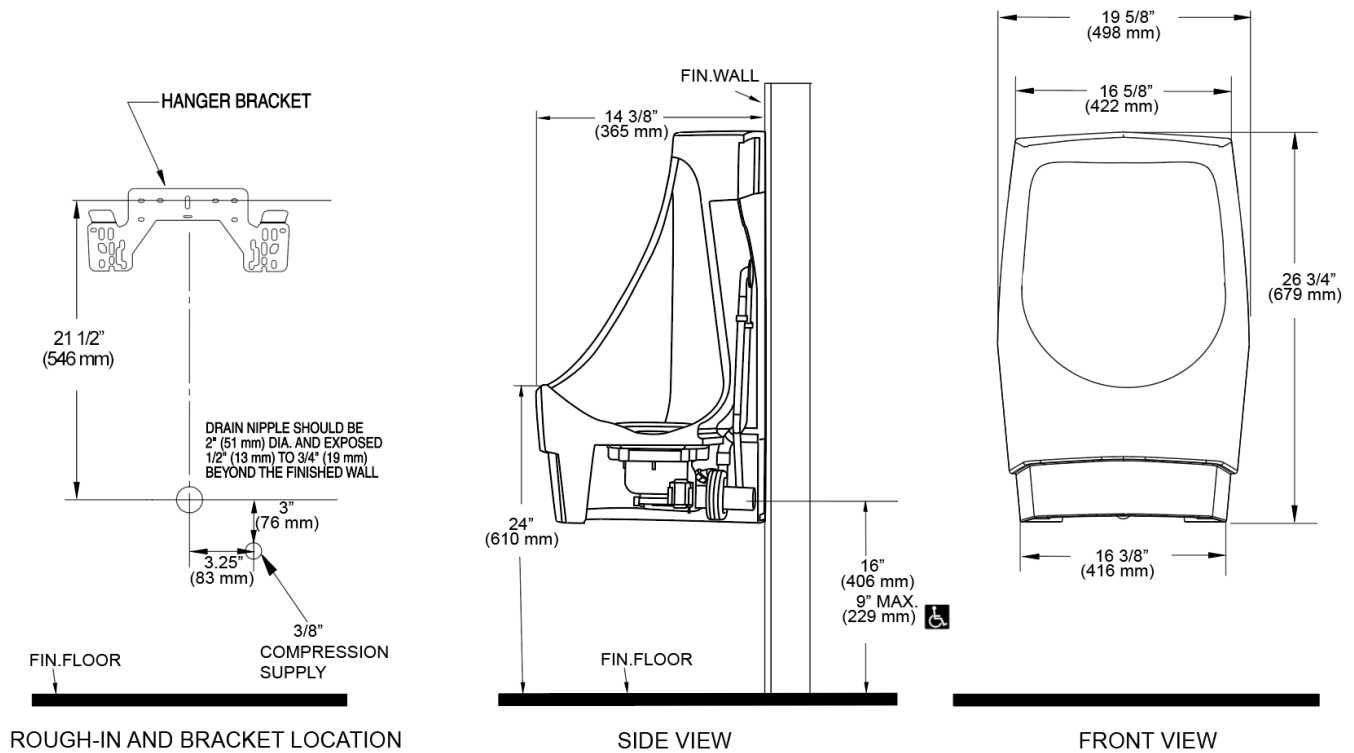

NOTE: ADA urinal rim height requirements allow all heights 17" and below. Sloan strongly recommends roughing in the drain to achieve a 16½" rim height or less to ensure compliance.